



M12 Circular Connectors

Moulded cable connectors - X-coded

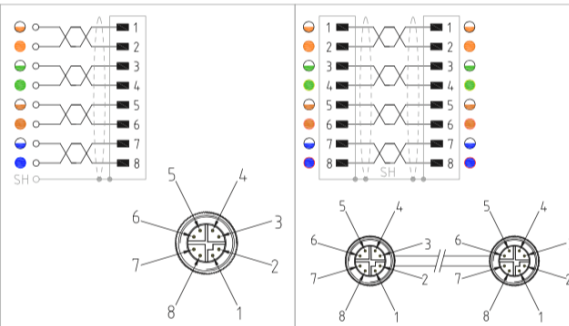

Technical drawing



Product description

Connector type	Circular connector with moulded cable	Circular connector with moulded cable	
Conforms to	IEC 61076-2-101	IEC 61076-2-101	
Construction type	M12 X-Coded	M12 X-Coded	
Description	Circular connector M12 series, X-coded, TOTALLY SHIELDED with moulded cable	Extension M12-M12 connectors, X-coded, TOTALLY SHIELDED with moulded cable	

Housing type	Straight 180°	180°-180°	
Cable gland	Moulded cable	Moulded cable	
Contacts type	Male	Male-Male	
Number of contacts	8poles	8poles	
Housing colour	Black	Black	

Technical data

Type of termination	Contacts to crimp wires	Contacts to crimp wires	
Contacts material	Brass + Gold flash	Brass + Gold flash	
Coupling nut type	Knurl round	Knurl round	
M12 coupling nut material	Brass + Nickel plated	Brass + Nickel plated	
M12 coupling nut torque	0.4 N*m	0.4 N*m	
Rated voltage	48V AC/DC	48V AC/DC	
Rated current	0.5A	0.5A	
O-ring material	-	-	
Cable type	PUR/TPO ULStyle20236 high flex SHIELDED	PUR/TPO ULStyle20236 high flex SHIELDED	
Cable jacket colour	Green RAL6016	Green RAL6016	
No. Conductors / Section	8x0.14mm²	8x0.14mm²	
Conductor colours	Wh/Or;Or;Wh/Gn;Gn;Wh/Bn;Bn;Wh/Bu;Bu	Wh/Or;Or;Wh/Gn;Gn;Wh/Bn;Bn;Wh/Bu;Bu	
Cable diameter	ø7.2mm (±0.3)	ø7.2mm (±0.3)	
Cable length	1m	1m	

Packaging

Qty/Bag	1 pc / bag	1 pc / bag	
---------	------------	------------	--

Other accessories options

See accessories section

Notes:

Connectors available with different features:
See the general features and codification scheme page
See the cables list section